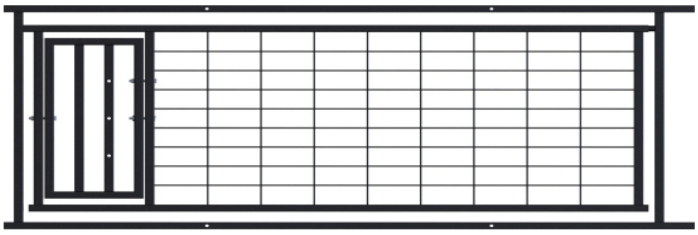
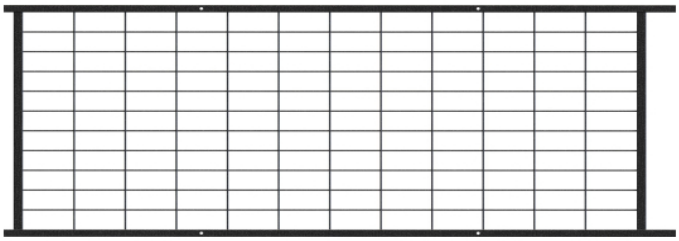




DOG KENNEL

Step-by Step Assembly Instructions

Finishded size: 96.06"x47.24"x71.85"


Step1. Check the Parts before assembly.

Item	Sketch	Quantity
Kennel Gate		1 Piece
Kennel Panel		11 Pieces
Roof Truss Frame		5 Pieces
Roof Cover		1 Piece


Gate Latch X 1 PC	Bolt & Nuts X 24 Units	Elastic Ball Strap X 18 PCS	Bowl and Frame X 1 Units
			

Please note: For quick and safe assembly, 1 or 2 helper would be recommended, since the kennels are too heavy. The product carton include a parts plastic bag. To avoid danger of suffocation, keep this parts plastic bag awayfrom babies and children. Do not use this bag in cribs, beds, carriages or play pens. This bag is not toy.


Step2.Lay out Panels and Gate like the following. Note:The“ kennel gate panel” can be placed around the kennelas needed.

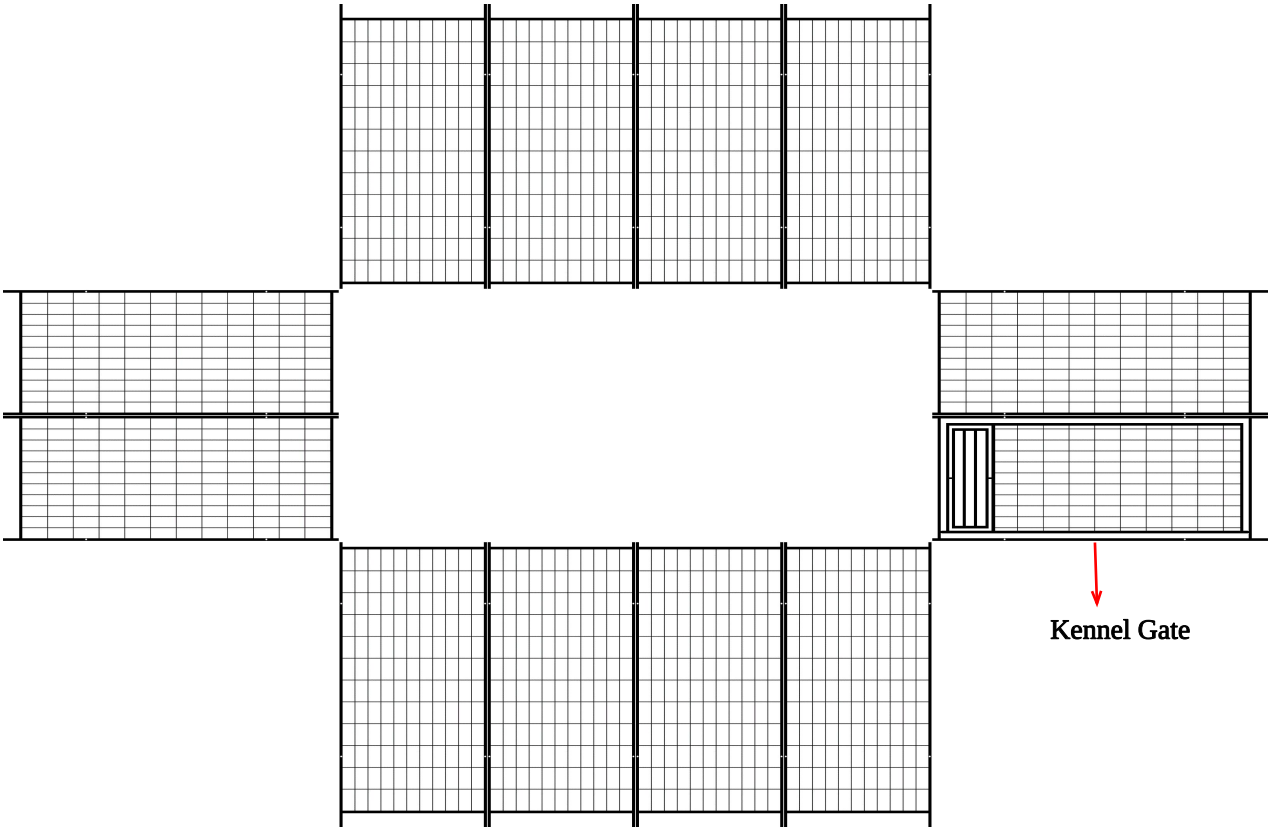

Step 3. Ensure that front and rear pannel is placed on the outside of the side panels, so that the top connection of the pannel matches the roof truss framing for installation. Vertical View.

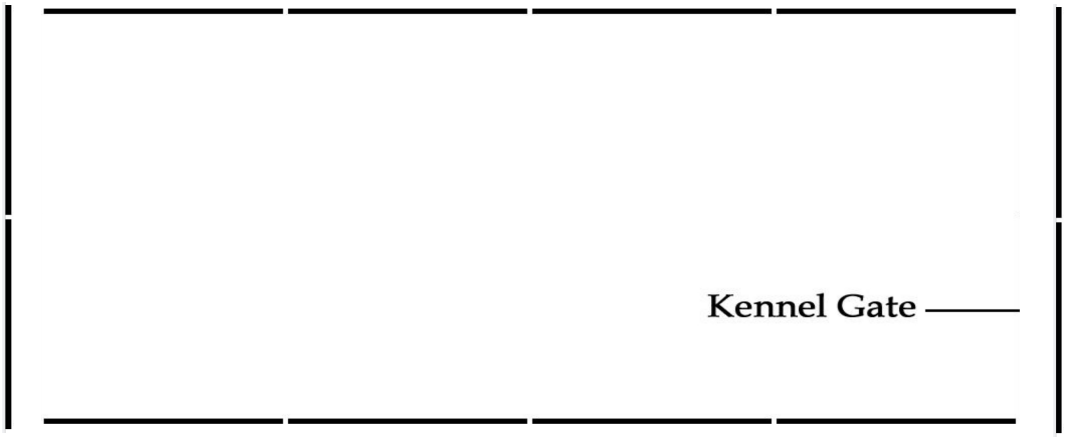


Step 4. Connect the Panels and Gate with the Bolts and nuts.

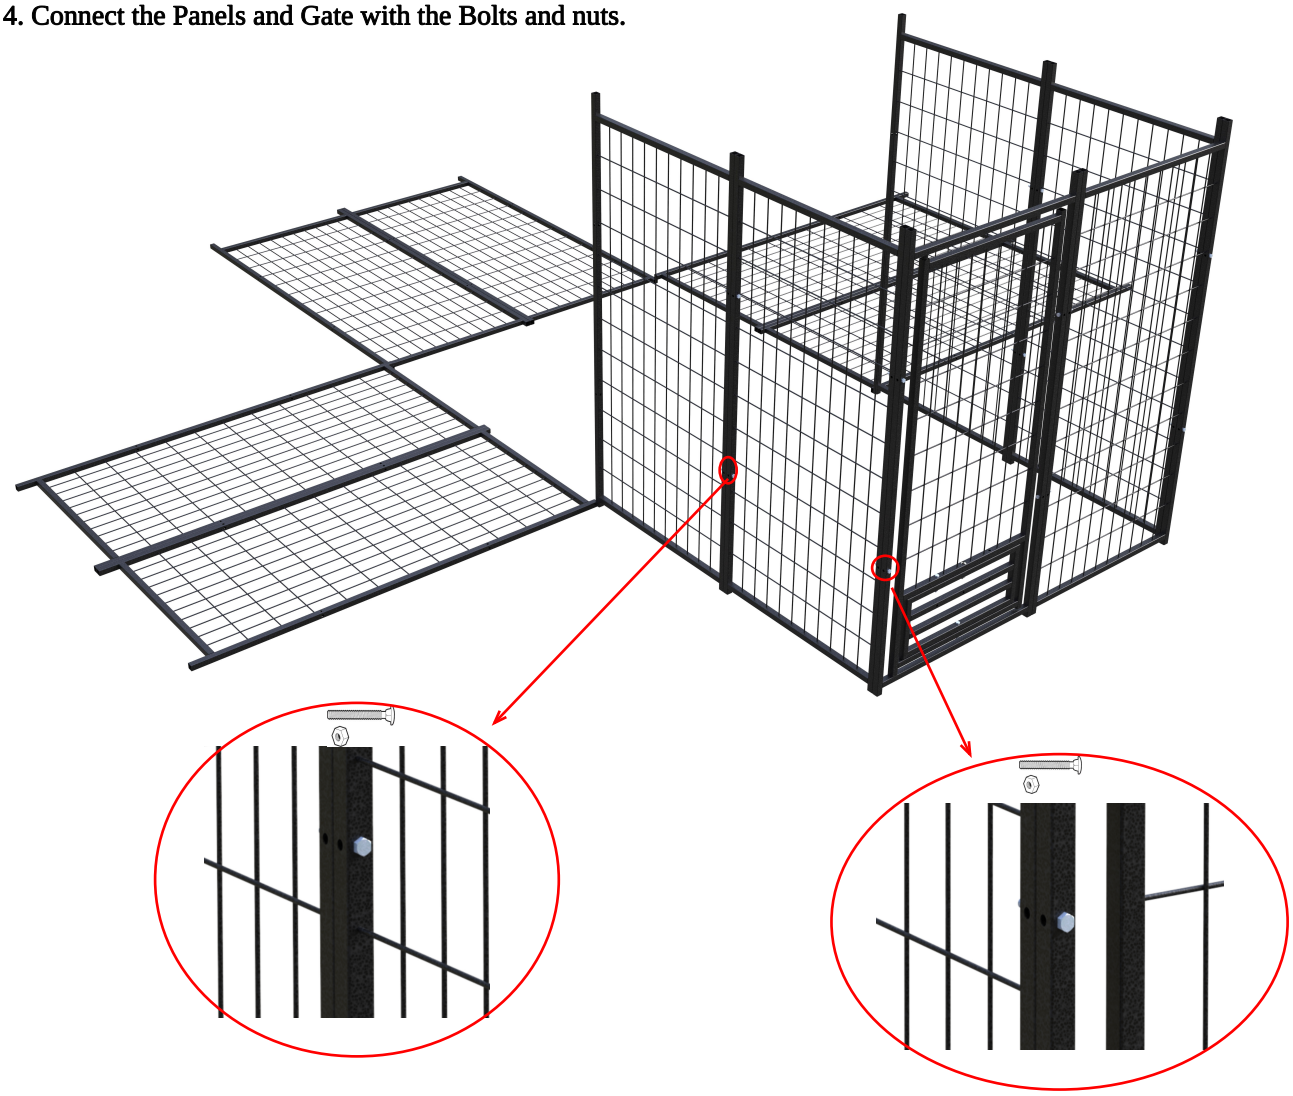



Step 5. Install the Latch. Use bolts and nuts to secure the Latch.

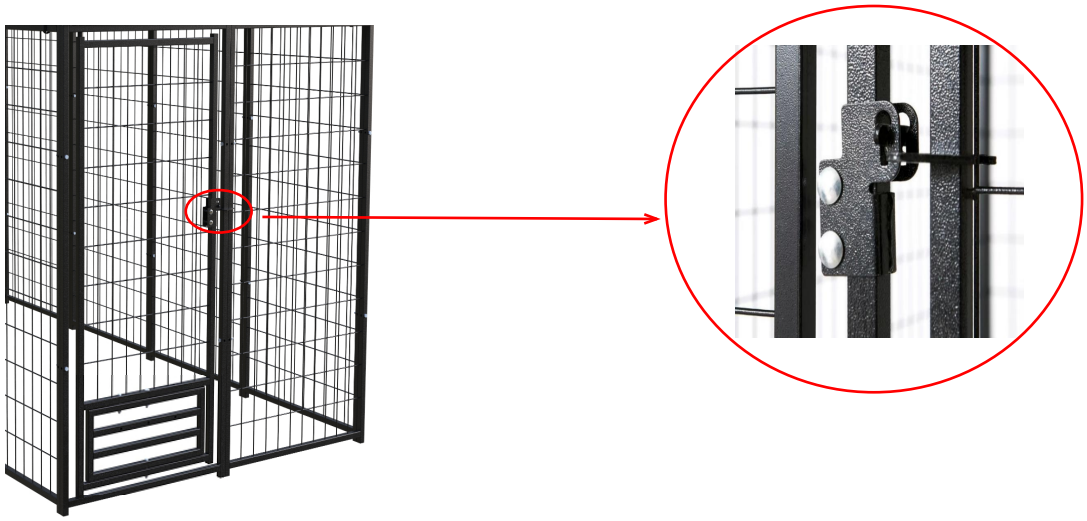

Step 6 . Install the Bowl.
Fix the frame of the Bowl to the rotating panel and then insert the Bowls to the frame. Use three pairs of bolts and nuts to secure the dog bowls to the rotating door panel.



Front View




Back View

NOTE:The feeding door can rotate and be fixed. When you want to fix it, simply insert a bolt through the two circle positions in the picture. When the bolt is removed, the feeding door can rotate 360 degrees.




Step 7. As shown in the figure, insert the Roof Truss Frames into the corresponding position.

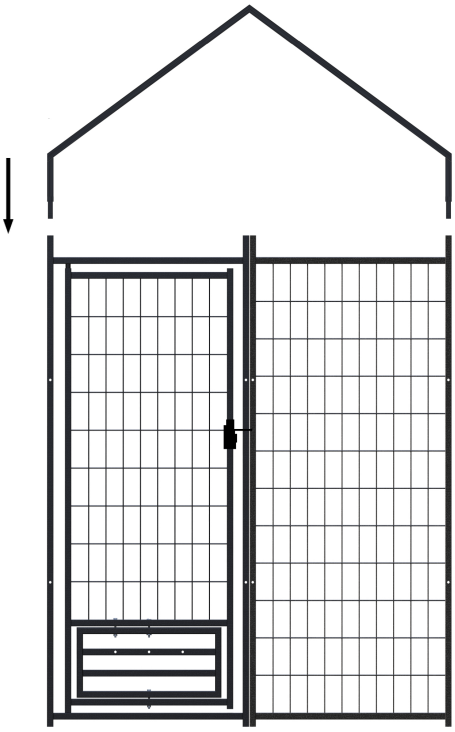



Step 8. Drape Roof Cover over the frame and evenly attach with Elastic Ball Strap.

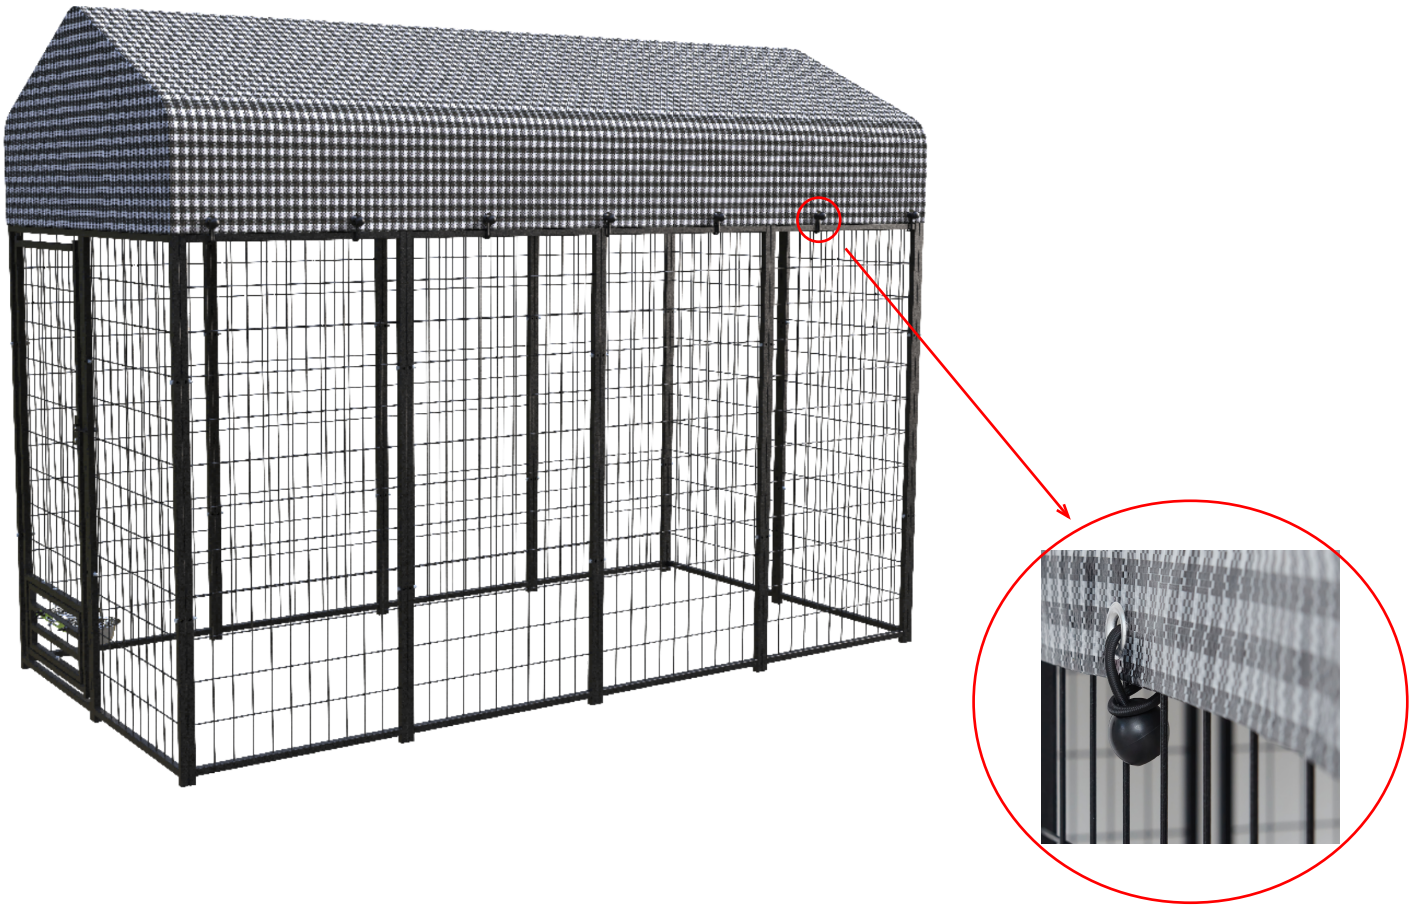

Please- for your pets's safety - train your pet to become accustomed to his/her new home. Consult a professional for help.